

EXPERIENCE THE DIFFERENCE

MPI is the worldwide leader in wax-room and ceramic core equipment and the acknowledged leader in wax-room innovations. MPI has developed and introduced more systems and products than all its competitors combined and offers wax-room solutions that can't be found anywhere else.



WAX INJECTORS

MPI's wax and ceramic injection machines are the most sophisticated in the industry and generate higher casting yields, more patterns per hour, reduced scrap, and increased productivity. They're also the most reliable in the industry, which means higher system availability, lower maintenance costs, and better performance.

AUTOMATION

MPI is at the forefront of automation, having automated some of the most complex processes in the investment casting industry for well over a decade. MPI's automated injection and assembly cells provide the capability to make and assemble wax patterns from the simplest commercial parts to complex patterns required by the medical and aerospace industries, including single crystal turbine blades. MPI can automate a single process or implement full-scale automation for your facility.


MPI TECHNOLOGY CENTER

MPI is at its best when it can innovate. MPI prides itself at being able to look at problems and then customize solutions that help clients achieve their goals. The MPI Technology Center is a state-of-the-art wax room that allows MPI to do just that. Located at MPI's world headquarters in New York, the Technology Center is a hub of innovation, ingenuity, and problem solving. Customers and suppliers visit this sophisticated facility to discover new ways to solve their unique wax-room challenges and to experience a totally automated facility in full operation.

MPI EXCELS

Most important, return on investment (ROI) is where MPI excels. MPI supports its customers' bottom line with creative, customized products and services that fit their evolving needs. Through collaboration, we innovate, design, build, and integrate solutions that deliver measurable results.



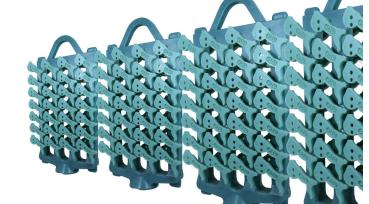

SA20-06-06





C-FRAME WAX INJECTOR

MPI 55

The MPI 55 series injector is an incredibly versatile machine. It is ideal for all types of applications from commercial medical and aerospace to thinned walled patterns, cored patterns and everything in between. The MPI 55 series is the most popular model... for good reason.

MPI's unique C-Frame design is the most ergonomically friendly system of its kind, offering the operator easy, unobstructed access to the work area while delivering the uniform die clamping capabilities you need.

(845) 471-7630 • mpi-systems.com You Tibe Linked in F (845) 471-7630 • mpi-systems.com



MPI 55 Series


Semi Automatic Wax Injector

Some of the MPI 55 features:

- MPI's Rigid C-Frame
- One or two Wax-Conditioning Reservoirs with 5-Zone, Temperature-Controlled Injection System
- Shuttle Tables, Single or Dual
- Programmable Nozzle Positioning Option
- Platen Heating and Cooling Options

Injection Control:

MPI delivers the tightest temperature control in the industry. The MPI 5-Zone, Temperature-Control System monitors wax temperature at specific locations, providing the most accurate temperature control with the highest throughput in the industry. By maintaining a set temperature through all zones, we are able to achieve extraordinary pattern-to-pattern repeatability.



Process Control

Nozzle... an industry best.

MPI 55 machines, models SA and SM, are equipped with Smart ControlsTM, our state-of-the-art process control technology that utilizes user-friendly, Windows-based, injection-control software and intuitive touch-screen display. MPI Smart SystemsTM consistently monitor and control all variables in real time against your pre-established baselines for wax temperature, wax flow, wax pressure and injection time, resulting in patterns that are consistent and of the highest quality. This technology eliminates the possibility of accidentally making an out-of-tolerance wax pattern. No one else even comes close. Best of all, MPI's remote-access technology allows the MPI service department to troubleshoot, diagnose, update or provide new features remotely — anywhere, anytime.

MPI's Wax-Conditioning Reservoir accurately conditions wax to optimum viscosity, providing consistent results from pattern to pattern regardless of the source-wax temperature. We achieve highly


controlled injection results through precise temperature management utilizing our Flex-noz® Injection




Flexibility & Options:

The MPI 55 series offers flexibility in creating the ideal machine for your needs. MPI offers models with clamping forces that deliver 25, 40, 50 and 100 ton capabilities, offering between 18" and 38" of daylight. Other options include Two Wax-Conditioning Reservoirs which allows for rapid wax changes at the touch of a button, providing a constant supply of accurate and repeatable temperature wax from a liquid to a heavy paste consistency. MPI systems are engineered with Quick-Change Technology with fast die change and setup to minimize change over time and maximize throughput.

MPI's optional independently operated Dual Shuttle Tables with Programmable Nozzle Positioning allows two different-size dies to be run independently from each die's stored injection recipe. Our Programmable-Platen-Control option reduces setup time by automatically recalling the platen parameters from the stored platen recipe. MPI also offers Smart Purge™, a unique system that re-circulates wax through the entire injection system. Smart Purge™ puts the wax in a dynamic state and supplies a fresh homogeneous wax from the reservoir to the nozzle tip prior to injection. Regardless of your needs, MPI engineers will build you a unique machine that delivers performance levels that are unmatched in the industry and will produce bottom-line results.







SIDE VIEW

FRONT VIEW

TOP VIEW

MODEL	55-25-24 US (60 HZ)	55-50-30 US (60 HZ)	55-100-32 US (60 HZ)	55-100-38 US (60 HZ)
Clamp Force	25 ton	50 ton	100 ton	100 ton
A. Daylight Maximum	24 in	30 in	32 in	38 in
B. Daylight Minimum	4 in			
C. Overall Height	101 in	119 in	132 in	142 in
D. Overall Width	78.3 in	91 in	118 in	
Wax Reservoir Capacity	30 gallon			
Single Shot Capacity	150 cu. in 400 cu. in		cu. in	
Injection Pressure	50 - 1,000 psi			
Injection Rate	0-15 cu in/sec			
Injection Time	0- 999 second			
Electric Standard	460V. 60Hz, 3ph			
Air Requirements	6 CFM @ 90 psi			
Machine Weight	5,500 lb	10,000 lb	26,000 lb	27,000 lb

Notes: Shuttle work table work area reduced when supplied with platen guarding. Optional equipment may alter the machines overall dimensions, weight, and power requirements. The daylight described herein is a nominal dimension. The actual daylight for your machine may be up to 3/8"(9.5mm) less than this dimension. Contact MPI sales department for available options. We reserve the right to change specifications without notice.